


JRA

1878 GRAEFIELD RD. BIRMINGHAM MI 48009 248-637-9480 248-637-9481 FAX USA
WEB <http://www.jraco.com>

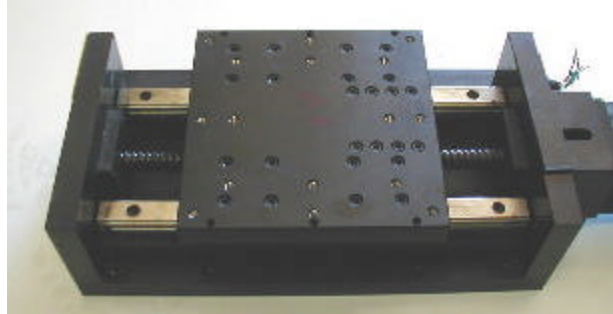

*ANODIZING AVAILABLE AS AN OPTION

JRA LINEAR SLIDE UNITS

STANDARD OR CUSTOM TRAVEL LENGTH
THOMSON BALL SCREW DRIVEN
NEMA 23 MOTOR MOUNTS
ALUMINUM PLATE CONSTRUCTION
HIGH CAPACITY LINEAR GUIDEWAYS WITH PRELOAD
HIGH RIGIDITY
HIGH ACCURACY

JRA linear slide units are a cost effective and accurate positioning system for a variety of motion control applications. Our use of high capacity linear guideways and **Thomson ballscrews and nuts** insures rigidity and accuracy for the most demanding applications including, cnc milling, drilling, machine tools, pick and place and dispensing.

Units may be stacked to create XY tables For 3 axis desktop machines featuring this same construction. please contact us directly. The slide units are currently available in three sizes with 8" ,12" and 15" of linear travel. All carriages are 7.5" square. Standard motor mounts are nema 23. Connections from the motor to the ballscrew are made via helical coupling. Our complete line of cnc servo controls

Are well suited to these positioners. Please consult our applications engineers for custom sizes and quotations.

SPECIFICATIONS

DRIVE TRAIN	THOMSON BALLSCREW 5 TPI (.200" LEAD)
HEIGHT	3.25 "
WIDTH	7.00" AT BASE 7.50" AT CARRAIGE
CONSTRUCTION	1.00" THICK ALUMINUM MIC6 PLATE THRU OUT
CARRIAGE	7.5" SQUARE
RAIL/TRUCK TYPE	RECTANGULAR RECIRCULATING BALL BEARING
TRUCK DYNAMIC LOAD CAPACITY	3000LBS / TRUCK 4 TRUCKS PER SLIDE UNIT

TRAVEL

LS8	8"
LS12	12"
LS15	15"

LENGTH

LS8	18"
LS12	22"
LS15	25"

PRICING

2-01

LS8	\$750.00
LS12	\$850.00
LS15	\$900.00

TERMS

[INTERNATIONAL CUSTOMERS PLEASE CONTACT OUR SALES DEPT FOR TERMS](#)

PRICE DOES NOT INCLUDE SHIPPING
COD AND PREPAID ORDERS ACCEPTED
ALLOW 3-4 WEEKS FOR DELIVERY

MAKE CHECKS PAYABLE TO: **JRA**

**Mail to: JRA
1878 GRAEFIELD RD
BIRMINGHAM MI 48009
USA**